


■ドリルソケット


●モールステーパ軸の工具に使用

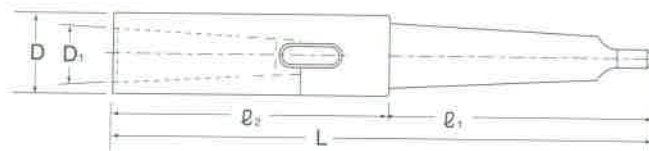

品番	サイズ	内径 (MT)	外径 (MT)	D1	D2	l1	l2	L	品番	サイズ	内径 (MT)	外径 (MT)	D1	D2	l1	l2	L
DC-11Y	1X1	1	1	12.065	12.065	65.5	81.5	147.0	DC-42Y	4X2	4	2	31.267	17.780	78.2	142.5	221.0
DC-12Y	1X2	1	2	12.065	17.780	78.5	81.5	160.0	DC-43Y	4X3	4	3	31.267	23.825	98.0	142.0	240.0
DC-13Y	1X3	1	3	12.065	23.825	98.0	82.0	180.0	DC-44Y	4X4	4	4	31.267	31.267	123.0	142.0	265.0
DC-14Y	1X4	1	4	12.065	31.267	123.0	77.0	200.0	DC-45Y	4X5	4	5	31.267	44.399	155.5	142.5	298.0
DC-15Y	1X5	1	5	12.065	44.399	155.5	79.5	235.0	DC-46Y	4X6	4	6	31.267	63.348	217.5	142.5	360.0
DC-21Y	2X1	2	1	17.780	12.065	65.5	97.5	163.0	DC-53Y	5X3	5	3	44.399	23.825	98.0	177.0	275.0
DC-22Y	2X2	2	2	17.780	17.780	78.5	97.5	176.0	DC-54Y	5X4	5	4	44.399	31.267	123.0	177.0	300.0
DC-23Y	2X3	2	3	17.780	23.825	98.0	97.0	195.0	DC-55Y	5X5	5	5	44.399	44.399	155.5	177.5	333.0
DC-24Y	2X4	2	4	17.780	31.267	123.0	97.0	220.0	DC-56Y	5X6	5	6	44.399	63.348	217.5	177.5	395.0
DC-25Y	2X5	2	5	17.780	44.399	155.5	97.5	253.0	DC-65Y	6X5	6	5	63.348	44.399	155.5	235.0	390.5
DC-32Y	3X2	3	2	23.825	17.780	78.6	117.5	196.0	DC-66Y	6X6	6	6	63.348	63.348	217.5	235.0	452.5
DC-33Y	3X3	3	3	23.825	23.825	98.0	117.0	215.0	DC-67Y	6X7	6	7	63.348	83.058	295.0	235.0	530.0
DC-34Y	3X4	3	4	23.825	31.267	123.0	117.0	240.0									
DC-35Y	3X5	3	5	23.825	44.399	155.5	117.5	273.0									
DC-36Y	3X6	3	6	23.825	63.348	217.5	117.0	334.5									

■レースセンター (超鋼付チップ付)

●先端角度 (Q) 標準角度以外の70°・75°・90°の寸法もありますのでお問い合わせ下さい。

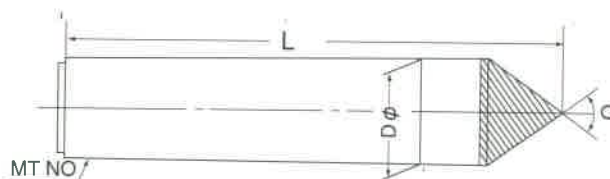

品番	MT軸サイズ	L	D(Φ)	Q	先端チップ径(d)	品番	MT軸サイズ	L	D(Φ)	Q	先端チップ径(d)		
RSP-1	MT-1	82	12.065	60°	6	RSP-4	MT-4	155	31.260	60°	14		
RSP-1-8					8	RSP-4-18					18		
RSP-1-10					10	RSP-4-32					32		
RSP-1-12					12	RSP-5	MT-5	200	44.390	60°	18		
RSP-2	8	RSP-5-30	30										
RSP-2-10	10	RSP-5-45	45										
RSP-2-14	MT-2	100	17.780	60°	14	RSP-6	MT-6	270	63.340	60°	30		
RSP-2-18					18	RSP-7	MT-7	340	83.050	75°	50		
RSP-3					10								
RSP-3-14	MT-3	125	23.820	60°	14								
RSP-3-18					18								
RSP-3-24					24								

■レースセンター (全鋼)

品番	MT軸サイズ	L	D(Φ)	Q	品番	MT軸サイズ	L	D(Φ)	Q
RS-1	MT-1	82	12.065	60°	RS-5	MT-5	200	44.390	60°
RS-2	MT-2	100	17.78	60°	RS-6	MT-6	270	63.340	60°
RS-3	MT-3	125	23.82	60°	RS-7	MT-7	340	83.050	75°
RS-4	MT-4	155	31.26	60°					

■ドリフト

●ボール盤及びドリルソケット等に挿入した工具を抜くときに使用する便利な器具です。



D-3



品番	番号	全長	巾	厚	使用するスリ-ソケット番号	普通品価格	焼入品価格
D-1	No.1	95	16	4.5	MT 1	1,130 円	1,700 円
D-2	No.2	115	19	6.0	MT 2	1,430	2,150
D-3	No.3	136	25	8.0	MT 3	1,860	2,810
D-4	No.4	180	33	12.0	MT 4, 5, 6兼用	3,030	4,540